


Balance Series

Panorama Model

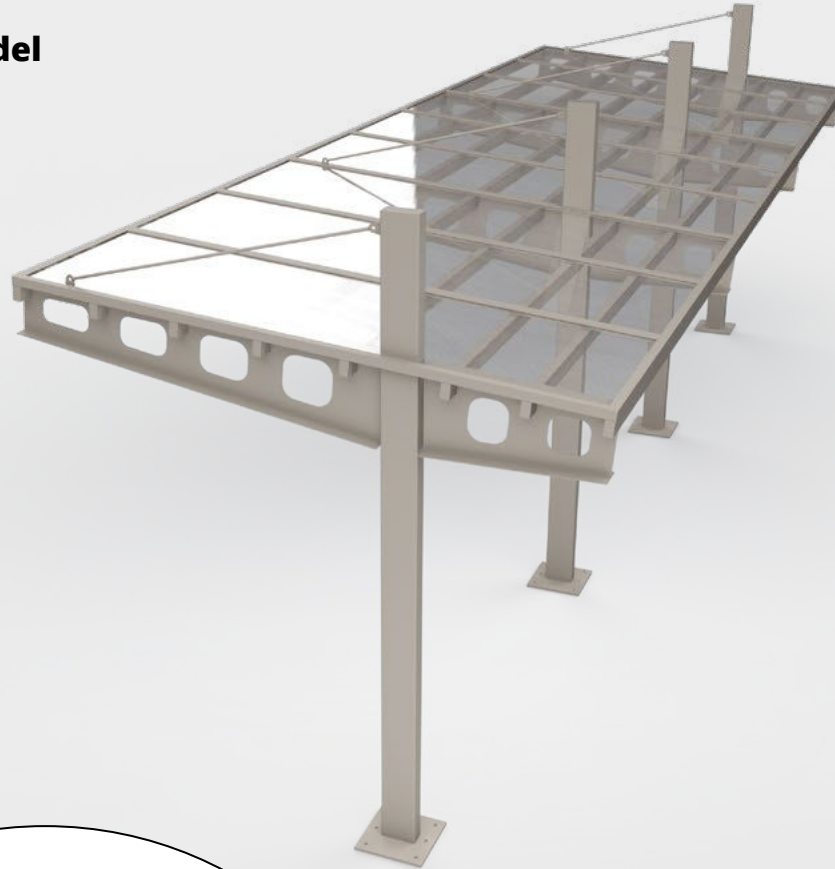

Specialized in Custom Design


Solid steel and aluminum structure

Load-bearing capacity to withstand the worst weather conditions

Flat roof with customized pitch

Maximum clearance between posts

Standard colours



50W steel posts

6061-T6 aluminum roof frame (3/16-inch thick)

Optional 28 gauge or thicker corrugated steel roof

Baked paint quality certified AAMA 2603, AAMA 2604 (on request)

Grade A2-70 stainless steel or Grade A325 hot-dip galvanized steel


hardware according to ASTM A153 or ASTM F2329

Cast anchors

Steel structural cables

16 mm RDC polycarbonate roof with UV protection and 0.57 shading coefficient (standard)

44W steel arch

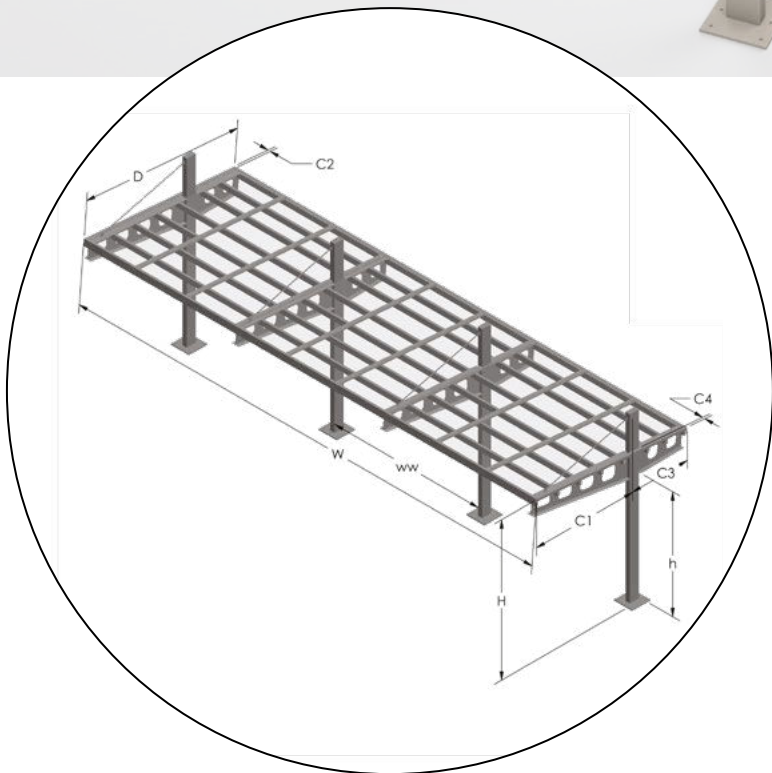


| Roofing options | | | Dimensions | | | | | | | | | | | | |
|-----------------|------------------------|----------------------|------------|--------|---------|---|-------|----|---------|----------------------|------------|-----|-------|-----|-------|
| Polycarbonate | Corrugated sheet metal | Wood and sheet metal | ww | h | H | S | W | dd | D | Front posts | Back posts | C1 | C2 | C3 | C4 |
| x | x | x | Max 144 | Std 80 | Max 144 | - | Max ∞ | - | Max 144 | Std 4 x 8 x 3/16 50W | - | D/2 | 2.125 | D/2 | 2.125 |



Corrugated sheet metal



Corrugated sheet metal

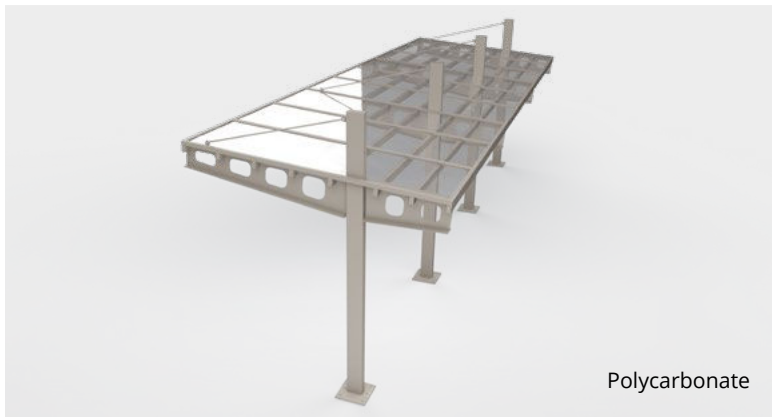

Polycarbonate



Polycarbonate



Wood and sheet metal



Wood and sheet metal



Aluminum and glass wall



Privacy panel



Sheet metal



Glass

Wall options

Glass

6 mm on clips for maximum ventilation

Panels with watertight frame

Several finish options for watertight frame: sheet metal, sheet metal and wood, glass, solid or perforated aluminum panels, and more

Privacy panel

Choice of 17 standard models or custom-made

Combination of options

E.g., an aluminum and glass wall

Also available are our doors, windows, sliding doors and 3-season fixed panels. Doors have the same finish options as walls.