

Load-bearing capacity to withstand the worst weather conditions

Flat roof with 2 slopes, maximum pitch of 3:12 Interior finished in jointed rustic pine

Rainwater is directed to strategic locations, ready to accommodate standard downspouts

Virtually self-sufficient vegetation system keeps maintenance to a minimum

Standard colours

White Khaki Grey Brown Black

50W steel posts

44W steel arch

Baked paint quality certified AAMA 2603, AAMA 2604 (on request) Grade A2-70 stainless steel or Grade A325 hot-dip galvanized steel hardware according to ASTM A153 or ASTM F2329

Mechanical anchors

Multi-layer roof with PVC membrane, insulation and root barrier Optional 28 gauge or thicker corrugated steel roof

R11.9 insulation coefficient

Significant sound insulation


Excellent LEED credit

Option of post and purlin made of grade 50W steel tubes

Roofing option	Dimensions												
Green roof	ww	h	Н	S	W	dd	D	Front posts	Back posts	<b>C1</b>	C2	С3	C4
х	Max 144	Std 84	3:12	-	Max ∞	Max 240*	Max 240	Std 4 x 4 x <sup>3</sup> / <sub>16</sub> steel	Std 4 x 4 x <sup>3</sup> / <sub>16</sub> steel	8	8	8	8





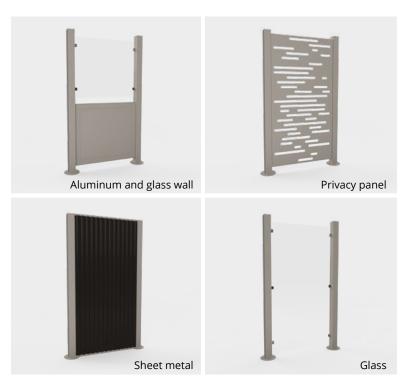

# **Wall options**

#### Glass

6 mm on clips for maximum ventilation

### Panels with watertight frame

Several finish options for watertight frame: sheet metal, sheet metal and wood, glass, solid or perforated aluminum panels, and more

## **Privacy panel**

Choice of 17 standard models or custom-made

#### **Combination of options**

E.g., an aluminum and glass wall

<u>Also available</u> are our doors, windows, sliding doors and 3-season fixed panels. Doors have the same finish options as walls.